






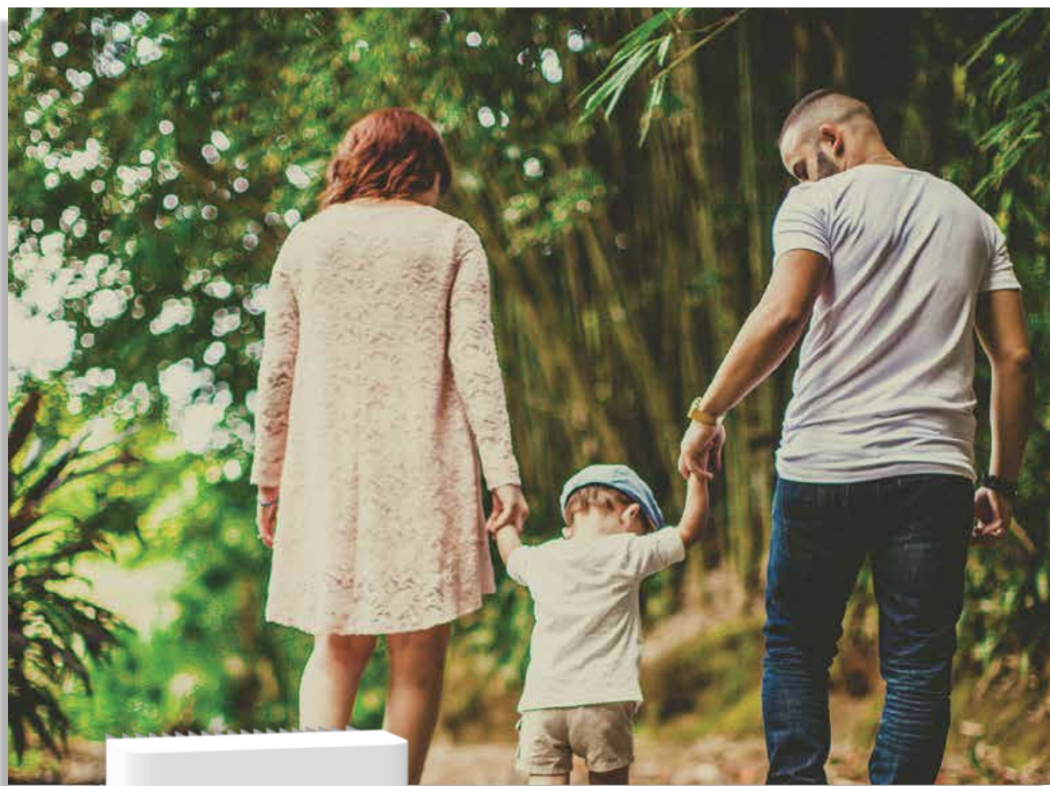

Single Phase String Inverter

SUN- 1 / 1.5 / 2 / 2.5 / 3 K-G04



-  1 MPP tracker, Max. efficiency up to 97.5%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)
-  Low start-up voltage of 80V







Technical Data

Model	SUN-1K-G04	SUN-1.5K-G04	SUN-2K-G04	SUN-2.5K-G04	SUN-3K-G04
Input Side					
Max. DC Input Power (kW)	1.3	2	2.6	3.3	3.6
Max. DC Input Voltage (V)	550				
Start-up DC Input Voltage (V)	80				
MPPT Operating Range (V)	70~500				
Max. DC Input Current (A)	13				
Max. Short Circuit Current (A)	19.5				
Number of MPPT / Strings per MPPT	1/1				
Output Side					
Rated Output Power (kW)	1	1.5	2	2.5	3
Max. Active Power (kW)	1.1	1.7	2.2	2.75	3.3
Nominal Output Voltage / Range (V)	L/N/PE 220V/187V-242V, 230V/ 195.5V-253V (Optional)				
Rated Grid Frequency (Hz)	50 / 60 (Optional)				
Operating Phase	Single phase				
Rated AC Grid Output Current (A)	4.3	6.5	8.7	10.9	13
Max. AC Output Current (A)	4.8	7.2	9.6	12	14.3
Output Power Factor	0.8 leading to 0.8 lagging				
Grid Current THD	<3%				
DC Injection Current (mA)	<0.5%				
Grid Frequency Range	47~52 or 57~62 (Optional)				
Efficiency					
Max. Efficiency	97.3%	97.3%	97.3%	97.3%	97.5%
Euro Efficiency	97.1%	97.1%	97.1%	97.1%	97.3%
MPPT Efficiency	>99%				
Protection					
DC Reverse-Polarity Protection	Yes				
AC Short Circuit Protection	Yes				
AC Output Overcurrent Protection	Yes				
Output Overvoltage Protection	Yes				
Insulation Resistance Protection	Yes				
Ground Fault Monitoring	Yes				
Anti-islanding Protection	Yes				
Temperature Protection	Yes				
Integrated DC Switch	Yes				
Remote software upload	Yes				
Remote change of operating parameters	Yes				
Surge protection	DC Type II / AC Type II				
General Data					
Size (mm)	330W×310H×115D				
Weight (kg)	6				
Topology	Transformerless				
Internal Consumption	<1W (Night)				
Running Temperature	-25~65°C, >45°C derating				
Ingress Protection	IP65				
Noise Emission (Typical)	<25 dB				
Cooling Concept	Natural cooling				
Max. Operating Altitude Without Derating	2000m				
Designed Lifetime	>20 years				
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11				
Operating Surroundings Humidity	0-100%				
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2				
Features					
DC Connection	MC-4 mateable				
AC Connection	IP65 rated plug				
Display	LCD1602				
Interface	RS485/RS232/Wifi/LAN				

Single Phase String Inverter

SUN- 3 / 3.6 / 4 / 4.6 / 5 / 6 K-G04




-  2 MPP trackers, Max. efficiency up to 97.5%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)
-  Low start-up voltage of 80V

Technical Data

Model	SUN-3K-G04	SUN-3.6K-G04	SUN-4K-G04	SUN-4.6K-G04	SUN-5K-G04	SUN-6K-G04
Input Side						
Max. DC Input Power (kW)	3.6	4.7	5.2	5.98	6.5	7.8
Max. DC Input Voltage (V)	550					
Start-up DC Input Voltage (V)	80					
MPPT Operating Range (V)	70~500					
Max. DC Input Current (A)	13+13					
Max. Short Circuit Current (A)	19.5+19.5					
Number of MPPT / Strings per MPPT	2/1					
Output Side						
Rated Output Power (kW)	3	3.6	4	4.6	5	6
Max. Active Power (kW)	3.3	3.96	4.4	5.06	5.5	6.6
Nominal Output Voltage / Range (V)	L/N/PE 220V/187V-242V, 230V/ 195.5V-253V (Optional)					
Rated Grid Frequency (Hz)	50 / 60 (Optional)					
Operating Phase	Single phase					
Rated AC Grid Output Current (A)	13	15.7	17.4	20	21.7	26.1
Max. AC Output Current (A)	14.3	17.2	19.1	22	23.9	28.7
Output Power Factor	0.8 leading to 0.8 lagging					
Grid Current THD	<3%					
DC Injection Current (mA)	<0.5%					
Grid Frequency Range	47~52 or 57~62 (Optional)					
Efficiency						
Max. Efficiency	97.3%	97.3%	97.5%	97.5%	97.5%	97.5%
Euro Efficiency	97.1%	97.1%	97.3%	97.3%	97.3%	97.3%
MPPT Efficiency	>99%					
Protection						
DC Reverse-Polarity Protection	Yes					
AC Short Circuit Protection	Yes					
AC Output Overcurrent Protection	Yes					
Output Overvoltage Protection	Yes					
Insulation Resistance Protection	Yes					
Ground Fault Monitoring	Yes					
Anti-islanding Protection	Yes					
Temperature Protection	Yes					
Integrated DC Switch	Yes					
Remote software upload	Yes					
Remote change of operating parameters	Yes					
Surge protection	DC Type II / AC Type II					
General Data						
Size (mm)	330W×323H×190D					
Weight (kg)	7.5					
Topology	Transformerless					
Internal Consumption	<1W (Night)					
Running Temperature	-25~65°C, >45°C derating					
Ingress Protection	IP65					
Noise Emission (Typical)	<25 dB					
Cooling Concept	Natural cooling					
Max. Operating Altitude Without Derating	2000m					
Designed Lifetime	>20 years					
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11					
Operating Surroundings Humidity	0-100%					
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					
Features						
DC Connection	MC-4 mateable					
AC Connection	IP65 rated plug					
Display	LCD1602					
Interface	RS485/RS232/Wifi/LAN					

Three Phase String Inverter

SUN- 4 / 5 / 6 / 7 / 8 / 10 / 12 K-G05 Plus

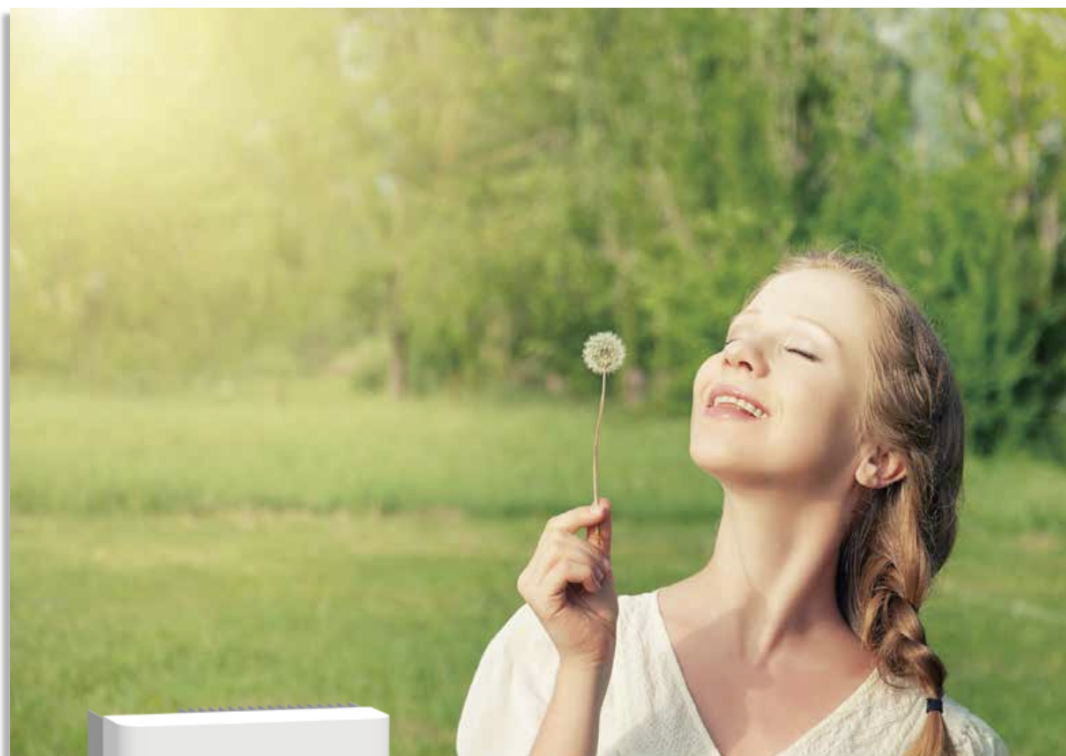

- 16** Max. DC input current of 16A/string, adpat to 600W solar panel
- M** 2 MPP trackers, Max. efficiency up to 98.3%
- F** Zero export application, VSG application
- A** String intelligent monitoring (optional)
- W** Wide output voltage range
- PID** Anti-PID function (Optional)






Technical Data

Model	SUN-4K-G05	SUN-5K-G05	SUN-6K-G05	SUN-7K-G05	SUN-8K-G05	SUN-10K-G05	SUN-12K-G05
Input Side							
Max. DC Input Power (kW)	5.2	6.5	7.8	9.1	10.4	13	15.6
Max. DC Input Voltage (V)	1000						
Start-up DC Input Voltage (V)	140						
MPPT Operating Range (V)	120~850						
Max. DC Input Current (A)	16+16						
Max. Short Circuit Current (A)	24+24						
Number of MPPT / Strings per MPPT	2/1						
Output Side							
Rated Output Power (kW)	4	5	6	7	8	10	12
Max. Active Power (kW)	4.4	5.5	6.6	7.7	8.8	11	13.2
Nominal Output Voltage / Range (V)	3L/N/PE 380V/323V-418V, 400V/340V-440V						
Rated Grid Frequency (Hz)	50 / 60 (Optional)						
Operating Phase	Three phase						
Rated AC Grid Output Current (A)	5.8	7.2	8.7	10.1	11.6	14.5	17.4
Max. AC Output Current (A)	6.4	8	9.6	11.2	12.8	15.9	19.1
Output Power Factor	0.8 leading to 0.8 lagging						
Grid Current THD	<3%						
DC Injection Current (mA)	<0.5%						
Grid Frequency Range	47~52 or 57~62 (Optional)						
Efficiency							
Max. Efficiency	98.3%						
Euro Efficiency	97.5%						
MPPT Efficiency	>99%						
Protection							
DC Reverse-Polarity Protection	Yes						
AC Short Circuit Protection	Yes						
AC Output Overcurrent Protection	Yes						
Output Overvoltage Protection	Yes						
Insulation Resistance Protection	Yes						
Ground Fault Monitoring	Yes						
Anti-islanding Protection	Yes						
Temperature Protection	Yes						
Integrated DC Switch	Yes						
Remote software upload	Yes						
Remote change of operating parameters	Yes						
Surge protection	DC Type II / AC Type II						
General Data							
Size (mm)	330W×457H×185D						330×457×205
Weight (kg)	10						11
Topology	Transformerless						
Internal Consumption	<1W (Night)						
Running Temperature	-25~65°C, >45°C derating						
Ingress Protection	IP65						
Noise Emission (Typical)	<25 dB						
Cooling Concept	Natural cooling						
Max. Operating Altitude Without Derating	2000m						
Designed Lifetime	>20 years						
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11						
Operating Surroundings Humidity	0-100%						
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2						
Features							
DC Connection	MC-4 mateable						
AC Connection	IP65 rated plug						
Display	LCD1602						
Interface	RS485/RS232/Wifi/LAN						

Three Phase String Inverter

SUN- 4 / 5 / 6 / 7 / 8 / 10 / 12 K-G05



-  2 MPP trackers, Max. efficiency up to 98.3%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)

Technical Data

Model	SUN-4K-G05	SUN-5K-G05	SUN-6K-G05	SUN-7K-G05	SUN-8K-G05	SUN-10K-G05	SUN-12K-G05
Input Side							
Max. DC Input Power (kW)	5.2	6.5	7.8	9.1	10.4	13	15.6
Max. DC Input Voltage (V)	1000						
Start-up DC Input Voltage (V)	140						
MPPT Operating Range (V)	120~850						
Max. DC Input Current (A)	13+13						
Max. Short Circuit Current (A)	19.5+19.5						
Number of MPPT / Strings per MPPT	2/1						
Output Side							
Rated Output Power (kW)	4	5	6	7	8	10	12
Max. Active Power (kW)	4.4	5.5	6.6	7.7	8.8	11	13.2
Nominal Output Voltage / Range (V)	3L/N/PE 380V/323V-418V, 400V/340V-440V						
Rated Grid Frequency (Hz)	50 / 60 (Optional)						
Operating Phase	Three phase						
Rated AC Grid Output Current (A)	5.8	7.2	8.7	10.1	11.6	14.5	17.4
Max. AC Output Current (A)	6.4	8	9.6	11.2	12.8	15.9	19.1
Output Power Factor	0.8 leading to 0.8 lagging						
Grid Current THD	<3%						
DC Injection Current (mA)	<0.5%						
Grid Frequency Range	47~52 or 57~62 (Optional)						
Efficiency							
Max. Efficiency	98.3%						
Euro Efficiency	97.5%						
MPPT Efficiency	>99%						
Protection							
DC Reverse-Polarity Protection	Yes						
AC Short Circuit Protection	Yes						
AC Output Overcurrent Protection	Yes						
Output Overvoltage Protection	Yes						
Insulation Resistance Protection	Yes						
Ground Fault Monitoring	Yes						
Anti-islanding Protection	Yes						
Temperature Protection	Yes						
Integrated DC Switch	Yes						
Remote software upload	Yes						
Remote change of operating parameters	Yes						
Surge protection	DC Type II / AC Type II						
General Data							
Size (mm)	330Wx457Hx185D						330x457x205
Weight (kg)	10						11
Topology	Transformerless						
Internal Consumption	<1W (Night)						
Running Temperature	-25~65°C, >45°C derating						
Ingress Protection	IP65						
Noise Emission (Typical)	<25 dB						
Cooling Concept	Natural cooling						
Max. Operating Altitude Without Derating	2000m						
Designed Lifetime	>20 years						
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11						
Operating Surroundings Humidity	0-100%						
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2						
Features							
DC Connection	MC-4 mateable						
AC Connection	IP65 rated plug						
Display	LCD1602						
Interface	RS485/RS232/Wifi/LAN						

Three Phase String Inverter(LV)

SUN- 6 / 8 K-G03-LV



- LV** 127/220Vac and 60Hz, Three phase system
- M** 2 MPP trackers, Max. efficiency up to 98.5%
- F** Zero export application, VSG application
- A** String intelligent monitoring (optional)
- W** Wide output voltage range
- PID** Anti-PID function (Optional)







Technical Data

Model	SUN-6K-G03-LV	SUN-8K-G03-LV
Input Side		
Max. DC Input Power (kW)	7.8	10.4
Max. DC Input Voltage (V)	800	
Start-up DC Input Voltage (V)	250	
MPPT Operating Range (V)	200~700	
Max. DC Input Current (A)	13+13	13+26
Max. Short Circuit Current (A)	19.5+19.5	19.5+39
Number of MPPT / Strings per MPPT	2/1	2/1+2
Output Side		
Rated Output Power (kW)	6	8
Max. Active Power (kW)	6.6	8.8
Nominal Output Voltage / Range (V)	3L/N/PE 127/220 176Vac~242Vac (this may vary with grid standards)	
Rated Grid Frequency (Hz)	60 / 50 (Optional)	
Operating Phase	Three phase	
Rated AC Grid Output Current (A)	15.7	21
Max. AC Output Current (A)	17.3	23.1
Output Power Factor	0.8 leading to 0.8 lagging	
Grid Current THD	<3%	
DC Injection Current (mA)	<0.5%	
Grid Frequency Range	57~62	
Efficiency		
Max. Efficiency	98.3%	98.5%
Euro Efficiency	97.5%	
MPPT Efficiency	>99%	
Protection		
DC Reverse-Polarity Protection	Yes	
AC Short Circuit Protection	Yes	
AC Output Overcurrent Protection	Yes	
Output Overvoltage Protection	Yes	
Insulation Resistance Protection	Yes	
Ground Fault Monitoring	Yes	
Anti-islanding Protection	Yes	
Temperature Protection	Yes	
Integrated DC Switch	Yes	
Remote software upload	Yes	
Remote change of operating parameters	Yes	
Surge protection	DC Type II / AC Type II	
General Data		
Size (mm)	330W×457H×205D	333W×472H×202D
Weight (kg)	11	15
Topology	Transformerless	
Internal Consumption	<1W (Night)	
Running Temperature	-25~65°C, >45°C derating	
Ingress Protection	IP65	
Noise Emission (Typical)	<25 dB	<40 dB
Cooling Concept	Natural cooling	Smart cooling
Max. Operating Altitude Without Derating	2000m	
Designed Lifetime	>20 years	
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11	
Operating Surroundings Humidity	0-100%	
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2	
Features		
DC Connection	MC-4 mateable	
AC Connection	IP65 rated plug	
Display	LCD1602	
Interface	RS485/RS232/Wifi/LAN	

Single Phase String Inverter

SUN- 7 / 7.5 / 8 / 9 / 10 / 10.5 K-G



-  2 MPP trackers, Max. efficiency up to 97.7%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)
-  Low start-up voltage of 80V

Technical Data

Model	SUN-7K-G	SUN-7.5K-G	SUN-8K-G	SUN-9K-G	SUN-10K-G	SUN-10.5K-G
Input Side						
Max. DC Input Power (kW)	9.1	9.8	10.4	11.7	13	13.7
Max. DC Input Voltage (V)	550					
Start-up DC Input Voltage (V)	80					
MPPT Operating Range (V)	70~500					
Max. DC Input Current (A)	13+26			26+26		
Max. Short Circuit Current (A)	19.5+39			39+39		
Number of MPPT / Strings per MPPT	2/1+2			2/2		
Output Side						
Rated Output Power (kW)	7	7.5	8	9	10	10.5
Max. Active Power (kW)	7.7	8.25	8.8	9.9	11	11.55
Nominal Output Voltage / Range (V)	L/N/PE 220V/187V-242V, 230V/ 195.5V-253V (Optional)					
Rated Grid Frequency (Hz)	50 / 60 (Optional)					
Operating Phase	Single phase					
Rated AC Grid Output Current (A)	30.4	32.6	34.8	39.1	43.5	45.7
Max. AC Output Current (A)	33.5	35.9	38.3	43	47.8	50.2
Output Power Factor	0.8 leading to 0.8 lagging					
Grid Current THD	<3%					
DC Injection Current (mA)	<0.5%					
Grid Frequency Range	47~52 or 57~62 (Optional)					
Efficiency						
Max. Efficiency	97.7%					
Euro Efficiency	97.5%					
MPPT Efficiency	>99%					
Protection						
DC Reverse-Polarity Protection	Yes					
AC Short Circuit Protection	Yes					
AC Output Overcurrent Protection	Yes					
Output Overvoltage Protection	Yes					
Insulation Resistance Protection	Yes					
Ground Fault Monitoring	Yes					
Anti-islanding Protection	Yes					
Temperature Protection	Yes					
Integrated DC Switch	Yes					
Remote software upload	Yes					
Remote change of operating parameters	Yes					
Surge protection	DC Type II / AC Type II					
General Data						
Size (mm)	330Wx410Hx198.5D					
Weight (kg)	15.7					
Topology	Transformerless					
Internal Consumption	<1W (Night)					
Running Temperature	-25~65°C, >45°C derating					
Ingress Protection	IP65					
Noise Emission (Typical)	<25 dB					
Cooling Concept	Natural cooling					
Max. Operating Altitude Without Derating	2000m					
Designed Lifetime	>20 years					
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11					
Operating Surroundings Humidity	0-100%					
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					
Features						
DC Connection	MC-4 mateable					
AC Connection	IP65 rated plug					
Display	LCD1602					
Interface	RS485/RS232/Wifi/LAN					

Three Phase String Inverter(LV)

SUN- 10 K-G03-LV SUN- 12 / 15 K-G02-LV



- LV** 127/220Vac and 60Hz, Three phase system
- MPPT** 2 MPP trackers, Max. efficiency up to 98.6%
- F** Zero export application, VSG application
- IM** String intelligent monitoring (optional)
- WVR** Wide output voltage range
- PID** Anti-PID function (Optional)






Technical Data

Model	SUN-10K-G03-LV	SUN-12K-G02-LV	SUN-15K-G02-LV
Input Side			
Max. DC Input Power (kW)	13	15.6	19.5
Max. DC Input Voltage (V)	800		
Start-up DC Input Voltage (V)	250		
MPPT Operating Range (V)	200~700		
Max. DC Input Current (A)	32+32		
Max. Short Circuit Current (A)	48+48		
Number of MPPT / Strings per MPPT	2/2		
Output Side			
Rated Output Power (kW)	10	12	15
Max. Active Power (kW)	11	13.2	16.5
Nominal Output Voltage / Range (V)	3L/N/PE 127/220 176Vac~242Vac (this may vary with grid standards)		
Rated Grid Frequency (Hz)	60 / 50 (Optional)		
Operating Phase	Three phase		
Rated AC Grid Output Current (A)	26.2	31.5	39.4
Max. AC Output Current (A)	28.9	34.6	43.3
Output Power Factor	0.8 leading to 0.8 lagging		
Grid Current THD	<3%		
DC Injection Current (mA)	<0.5%		
Grid Frequency Range	57~62		
Efficiency			
Max. Efficiency	98.6%		
Euro Efficiency	98%		
MPPT Efficiency	>99%		
Protection			
DC Reverse-Polarity Protection	Yes		
AC Short Circuit Protection	Yes		
AC Output Overcurrent Protection	Yes		
Output Overvoltage Protection	Yes		
Insulation Resistance Protection	Yes		
Ground Fault Monitoring	Yes		
Anti-islanding Protection	Yes		
Temperature Protection	Yes		
Integrated DC Switch	Yes		
Remote software upload	Yes		
Remote change of operating parameters	Yes		
Surge protection	DC Type II / AC Type II		
General Data			
Size (mm)	330Wx508Hx206D		
Weight (kg)	20.8		
Topology	Transformerless		
Internal Consumption	<1W (Night)		
Running Temperature	-25~65°C, >45°C derating		
Ingress Protection	IP65		
Noise Emission (Typical)	<45 dB		
Cooling Concept	Smart cooling		
Max. Operating Altitude Without Derating	2000m		
Designed Lifetime	>20 years		
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11		
Operating Surroundings Humidity	0-100%		
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		
Features			
DC Connection	MC-4 mateable		
AC Connection	IP65 rated plug		
Display	LCD1602		
Interface	RS485/RS232/Wifi/LAN		

Three Phase String Inverter

SUN- 15 / 17 K-G05



-  2 MPPT trackers, Max. efficiency up to 98.5%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)






Technical Data

Model	SUN-15K-G05	SUN-17K-G05
Input Side		
Max. DC Input Power (kW)	19.5	22.1
Max. DC Input Voltage (V)	1000	
Start-up DC Input Voltage (V)	250	
MPPT Operating Range (V)	200~850	
Max. DC Input Current (A)	13+26	
Max. Short Circuit Current (A)	19.5+39	
Number of MPPT / Strings per MPPT	2/1+2	
Output Side		
Rated Output Power (kW)	15	17
Max. Active Power (kW)	16.5	18.7
Nominal Output Voltage / Range (V)	3L/N/PE 380V/323V-418V, 400V/340V-440V	
Rated Grid Frequency (Hz)	50 / 60 (Optional)	
Operating Phase	Three phase	
Rated AC Grid Output Current (A)	21.7	24.6
Max. AC Output Current (A)	23.9	27.1
Output Power Factor	0.8 leading to 0.8 lagging	
Grid Current THD	<3%	
DC Injection Current (mA)	<0.5%	
Grid Frequency Range	47~52 or 57~62 (Optional)	
Efficiency		
Max. Efficiency	98.5%	
Euro Efficiency	97.5%	
MPPT Efficiency	>99%	
Protection		
DC Reverse-Polarity Protection	Yes	
AC Short Circuit Protection	Yes	
AC Output Overcurrent Protection	Yes	
Output Overvoltage Protection	Yes	
Insulation Resistance Protection	Yes	
Ground Fault Monitoring	Yes	
Anti-islanding Protection	Yes	
Temperature Protection	Yes	
Integrated DC Switch	Yes	
Remote software upload	Yes	
Remote change of operating parameters	Yes	
Surge protection	DC Type II / AC Type II	
General Data		
Size (mm)	333W×472H×202D	
Weight (kg)	15	
Topology	Transformerless	
Internal Consumption	<1W (Night)	
Running Temperature	-25~65°C, >45°C derating	
Ingress Protection	IP65	
Noise Emission (Typical)	<40 dB	
Cooling Concept	Smart cooling	
Max. Operating Altitude Without Derating	2000m	
Designed Lifetime	>20 years	
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11	
Operating Surroundings Humidity	0-100%	
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2	
Features		
DC Connection	MC-4 mateable	
AC Connection	IP65 rated plug	
Display	LCD1602	
Interface	RS485/RS232/Wifi/LAN	

Three Phase String Inverter

SUN- 18 / 20 / 25 K-G04/G05



-  2 MPP trackers, Max. efficiency up to 98.6%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)

Technical Data

Model	SUN-18K-G04	SUN-20K-G04	SUN-25K-G04	SUN-18K-G05	SUN-20K-G05	SUN-25K-G05
Input Side						
Max. DC Input Power (kW)	23.4	26	32.5	23.4	26	32.5
Max. DC Input Voltage (V)	1000					
Start-up DC Input Voltage (V)	250					
MPPT Operating Range (V)	200~850					
Max. DC Input Current (A)	32+32			26+26		
Max. Short Circuit Current (A)	48+48			39+39		
Number of MPPT / Strings per MPPT	2/2					
Output Side						
Rated Output Power (kW)	18	20	25	18	20	25
Max. Active Power (kW)	19.8	22	27.5	19.8	22	27.5
Nominal Output Voltage / Range (V)	3L/N/PE 380V/323V~418V, 400V/340V~440V					
Rated Grid Frequency (Hz)	50 / 60 (Optional)					
Operating Phase	Three phase					
Rated AC Grid Output Current (A)	26.1	29	36.2	26.1	29	36.2
Max. AC Output Current (A)	28.7	31.9	39.8	28.7	31.9	39.8
Output Power Factor	0.8 leading to 0.8 lagging					
Grid Current THD	<3%					
DC Injection Current (mA)	<0.5%					
Grid Frequency Range	47~52 or 57~62 (Optional)					
Efficiency						
Max. Efficiency	98.6%					
Euro Efficiency	97.8%					
MPPT Efficiency	>99%					
Protection						
DC Reverse-Polarity Protection	Yes					
AC Short Circuit Protection	Yes					
AC Output Overcurrent Protection	Yes					
Output Overvoltage Protection	Yes					
Insulation Resistance Protection	Yes					
Ground Fault Monitoring	Yes					
Anti-islanding Protection	Yes					
Temperature Protection	Yes					
Integrated DC Switch	Yes					
Remote software upload	Yes					
Remote change of operating parameters	Yes					
Surge protection	DC Type II / AC Type II					
General Data						
Size (mm)	330Wx508Hx206D			362Wx527Hx220D		
Weight (kg)	20.8			20		
Topology	Transformerless					
Internal Consumption	<1W (Night)					
Running Temperature	-25~65°C, >45°C derating					
Ingress Protection	IP65					
Noise Emission (Typical)	<45 dB					
Cooling Concept	Smart cooling					
Max. Operating Altitude Without Derating	2000m					
Designed Lifetime	>20 years					
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11					
Operating Surroundings Humidity	0-100%					
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					
Features						
DC Connection	MC-4 mateable					
AC Connection	IP65 rated plug					
Display	LCD1602					
Interface	RS485/RS232/Wifi/LAN					

Three Phase String Inverter(LV)

SUN- 20 / 25 / 30 K-G02-LV



- LV** 127/220Vac and 60Hz, Three phase system
- M** Max. 4 MPP trackers, Max. efficiency up to 98.7%
- F** Zero export application, VSG application
- S** String intelligent monitoring (optional)
- W** Wide output voltage range
- PID** Anti-PID function (Optional)






Technical Data

Model	SUN-20K-G02-LV	SUN-25K-G02-LV	SUN-30K-G02-LV
Input Side			
Max. DC Input Power (kW)	26	32.5	39
Max. DC Input Voltage (V)	800		
Start-up DC Input Voltage (V)	250		
MPPT Operating Range (V)	200~700		
Max. DC Input Current (A)	40+40	40+40+40	40+40+40+40
Max. Short Circuit Current (A)	60+60	60+60+60	60+60+60+60
Number of MPPT / Strings per MPPT	2/3	3/3	4/3
Output Side			
Rated Output Power (kW)	20	25	30
Max. Active Power (kW)	22	27.5	33
Nominal Output Voltage / Range (V)	3L/N/PE 127/220 176Vac~242Vac (this may vary with grid standards)		
Rated Grid Frequency (Hz)	60 / 50 (Optional)		
Operating Phase	Three phase		
Rated AC Grid Output Current (A)	52.5	65.6	78.7
Max. AC Output Current (A)	57.8	72.2	86.6
Output Power Factor	0.8 leading to 0.8 lagging		
Grid Current THD	<3%		
DC Injection Current (mA)	<0.5%		
Grid Frequency Range	57~62		
Efficiency			
Max. Efficiency	98.7%		
Euro Efficiency	98%		
MPPT Efficiency	>99%		
Protection			
DC Reverse-Polarity Protection	Yes		
AC Short Circuit Protection	Yes		
AC Output Overcurrent Protection	Yes		
Output Overvoltage Protection	Yes		
Insulation Resistance Protection	Yes		
Ground Fault Monitoring	Yes		
Anti-islanding Protection	Yes		
Temperature Protection	Yes		
Integrated DC Switch	Yes		
Remote software upload	Yes		
Remote change of operating parameters	Yes		
Surge protection	DC Type II / AC Type II		
General Data			
Size (mm)	362Wx577Hx215D	647.5Wx537Hx303.5D	
Weight (kg)	25.5	44.5	
Topology	Transformerless		
Internal Consumption	<1W (Night)		
Running Temperature	-25~65°C, >45°C derating		
Ingress Protection	IP65		
Noise Emission (Typical)	<45 dB		
Cooling Concept	Smart cooling		
Max. Operating Altitude Without Derating	2000m		
Designed Lifetime	>20 years		
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11		
Operating Surroundings Humidity	0-100%		
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		
Features			
DC Connection	MC-4 mateable		
AC Connection	IP65 rated plug		
Display	LCD1602		
Interface	RS485/RS232/Wifi/LAN		

Three Phase String Inverter

SUN- 30 / 33 / 35 / 36 K-G04



-  2 MPP trackers, Max. efficiency up to 98.6%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)






Technical Data

Model	SUN-30K-G04	SUN-33K-G04	SUN-35K-G04	SUN-36K-G04
Input Side				
Max. DC Input Power (kW)	39	42.9	45.5	46.8
Max. DC Input Voltage (V)	1000			
Start-up DC Input Voltage (V)	250			
MPPT Operating Range (V)	200~850			
Max. DC Input Current (A)	40+40			
Max. Short Circuit Current (A)	60+60			
Number of MPPT / Strings per MPPT	2/3			
Output Side				
Rated Output Power (kW)	30	33	35	36
Max. Active Power (kW)	33	36.3	38.5	39.6
Nominal Output Voltage / Range (V)	3L/N/PE 380V/323V-418V, 400V/340V-440V			
Rated Grid Frequency (Hz)	50 / 60 (Optional)			
Operating Phase	Three phase			
Rated AC Grid Output Current (A)	43.5	47.8	50.7	52.2
Max. AC Output Current (A)	47.9	52.6	55.8	57.4
Output Power Factor	0.8 leading to 0.8 lagging			
Grid Current THD	<3%			
DC Injection Current (mA)	<0.5%			
Grid Frequency Range	47~52 or 57~62 (Optional)			
Efficiency				
Max. Efficiency	98.6%			
Euro Efficiency	97.8%			
MPPT Efficiency	>99%			
Protection				
DC Reverse-Polarity Protection	Yes			
AC Short Circuit Protection	Yes			
AC Output Overcurrent Protection	Yes			
Output Overvoltage Protection	Yes			
Insulation Resistance Protection	Yes			
Ground Fault Monitoring	Yes			
Anti-islanding Protection	Yes			
Temperature Protection	Yes			
Integrated DC Switch	Yes			
Remote software upload	Yes			
Remote change of operating parameters	Yes			
Surge protection	DC Type II / AC Type II			
General Data				
Size (mm)	362Wx577Hx215D			
Weight (kg)	25.5			
Topology	Transformerless			
Internal Consumption	<1W (Night)			
Running Temperature	-25~65°C, >45°C derating			
Ingress Protection	IP65			
Noise Emission (Typical)	<45 dB			
Cooling Concept	Smart cooling			
Max. Operating Altitude Without Derating	2000m			
Designed Lifetime	>20 years			
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11			
Operating Surroundings Humidity	0-100%			
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			
Features				
DC Connection	MC-4 mateable			
AC Connection	IP65 rated plug			
Display	LCD1602			
Interface	RS485/RS232/Wifi/LAN			

Three Phase String Inverter

SUN- 30 / 33 / 35 / 40 / 50 / 60 K-G03



-  Max. 4 MPP trackers, Max. efficiency up to 98.7%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)







Technical Data

Model	SUN-30K-G03	SUN-33K-G03	SUN-35K-G03	SUN-40K-G03	SUN-50K-G03	SUN-60K-G03
Input Side						
Max. DC Input Power (kW)	39	42.9	45.5	52	65	78
Max. DC Input Voltage (V)	1000					
Start-up DC Input Voltage (V)	250					
MPPT Operating Range (V)	200~850					
Max. DC Input Current (A)	40+40	40+40+40		40+40+40+40		
Max. Short Circuit Current (A)	60+60	60+60+60		60+60+60+60		
Number of MPPT / Strings per MPPT	2/3	3/3		4/3		
Output Side						
Rated Output Power (kW)	30	33	35	40	50	60
Max. Active Power (kW)	33	36.3	38.5	44	55	66
Nominal Output Voltage / Range (V)	3L/N/PE 380V/323V-418V, 400V/340V-440V					
Rated Grid Frequency (Hz)	50 / 60 (Optional)					
Operating Phase	Three phase					
Rated AC Grid Output Current (A)	43.5	47.8	50.7	58	72.4	87
Max. AC Output Current (A)	47.9	52.6	55.8	63.8	79.7	95.7
Output Power Factor	0.8 leading to 0.8 lagging					
Grid Current THD	<3%					
DC Injection Current (mA)	<0.5%					
Grid Frequency Range	47~52 or 57~62 (Optional)					
Efficiency						
Max. Efficiency	98.7%					
Euro Efficiency	98%					
MPPT Efficiency	>99%					
Protection						
DC Reverse-Polarity Protection	Yes					
AC Short Circuit Protection	Yes					
AC Output Overcurrent Protection	Yes					
Output Overvoltage Protection	Yes					
Insulation Resistance Protection	Yes					
Ground Fault Monitoring	Yes					
Anti-islanding Protection	Yes					
Temperature Protection	Yes					
Integrated DC Switch	Yes					
Remote software upload	Yes					
Remote change of operating parameters	Yes					
Surge protection	DC Type II / AC Type II					
General Data						
Size (mm)	647.5Wx537Hx303.5D					
Weight (kg)	44.5					
Topology	Transformerless					
Internal Consumption	<1W (Night)					
Running Temperature	-25~65°C, >45°C derating					
Ingress Protection	IP65					
Noise Emission (Typical)	<45 dB					
Cooling Concept	Smart cooling					
Max. Operating Altitude Without Derating	2000m					
Designed Lifetime	>20 years					
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11					
Operating Surroundings Humidity	0-100%					
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					
Features						
DC Connection	MC-4 mateable					
AC Connection	IP65 rated plug					
Display	LCD 240 x 160					
Interface	RS485/RS232/Wifi/LAN					

Three Phase String Inverter(LV)

SUN- 35 / 40 / 45 / 50 K-G-LV



-  127/220Vac and 60Hz, Three phase system
-  4 MPP trackers, Max. efficiency up to 98.7%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)







Technical Data

Model	SUN-35K-G02-LV	SUN-40K-G-LV	SUN-45K-G-LV	SUN-50K-G-LV
Input Side				
Max. DC Input Power (kW)	45.5	52	58.5	65
Max. DC Input Voltage (V)	800			
Start-up DC Input Voltage (V)	250			
MPPT Operating Range (V)	200~700			
Max. DC Input Current (A)	30+30+30+30	40+40+40+40		
Max. Short Circuit Current (A)	45+45+45+45	60+60+60+60		
Number of MPPT / Strings per MPPT	4/3	4/4		
Output Side				
Rated Output Power (kW)	35	40	34.5	50
Max. Active Power (kW)	38.5	44	49.5	55
Nominal Output Voltage / Range (V)	3L/N/PE 127/220 176Vac~242Vac (this may vary with grid standards)			
Rated Grid Frequency (Hz)	60 / 50 (Optional)			
Operating Phase	Three phase			
Rated AC Grid Output Current (A)	91.9	104.9	118.1	131.2
Max. AC Output Current (A)	101.1	115.5	129.9	144.4
Output Power Factor	0.8 leading to 0.8 lagging			
Grid Current THD	<3%			
DC Injection Current (mA)	<0.5%			
Grid Frequency Range	57~62			
Efficiency				
Max. Efficiency	98.7%			
Euro Efficiency	98.3%			
MPPT Efficiency	>99%			
Protection				
DC Reverse-Polarity Protection	Yes			
AC Short Circuit Protection	Yes			
AC Output Overcurrent Protection	Yes			
Output Overvoltage Protection	Yes			
Insulation Resistance Protection	Yes			
Ground Fault Monitoring	Yes			
Anti-islanding Protection	Yes			
Temperature Protection	Yes			
Integrated DC Switch	Yes			
Remote software upload	Yes			
Remote change of operating parameters	Yes			
Surge protection	DC Type II / AC Type II			
General Data				
Size (mm)	700Wx575Hx297D			
Weight (kg)	60			
Topology	Transformerless			
Internal Consumption	<1W (Night)			
Running Temperature	-25~65°C, >45°C derating			
Ingress Protection	IP65			
Noise Emission (Typical)	<55 dB			
Cooling Concept	Smart cooling			
Max. Operating Altitude Without Derating	2000m			
Designed Lifetime	>20 years			
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11			
Operating Surroundings Humidity	0-100%			
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			
Features				
DC Connection	MC-4 mateable			
AC Connection	IP65 rated plug			
Display	LCD 240 x 160			
Interface	RS485/RS232/Wifi/LAN			

Three Phase String Inverter

SUN- 60 / 70 / 75 / 80 K-G



-  4 MPP trackers, Max. efficiency up to 98.7%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)
-  Type II DC/AC SPD







Technical Data

Model	SUN-60K-G04	SUN-70K-G04	SUN-75K-G04	SUN-80K-G04
Input Side				
Max. DC Input Power (kW)	78	91	97.5	104
Max. DC Input Voltage (V)	1000			
Start-up DC Input Voltage (V)	250			
MPPT Operating Range (V)	200~850			
Max. DC Input Current (A)	40+40+40+40			
Max. Short Circuit Current (A)	60+60+60+60			
Number of MPPT / Strings per MPPT	4/3	4/4	4/4	4/4
Output Side				
Rated Output Power (kW)	60	33	35	36
Max. Active Power (kW)	66	36.3	38.5	39.6
Nominal Output Voltage / Range (V)	3L/N/PE 380V/323V-418V, 400V/340V-440V			
Rated Grid Frequency (Hz)	50 / 60 (Optional)			
Operating Phase	Three phase			
Rated AC Grid Output Current (A)	87	101.5	108.7	115.9
Max. AC Output Current (A)	95.7	111.6	119.6	127.5
Output Power Factor	0.8 leading to 0.8 lagging			
Grid Current THD	<3%			
DC Injection Current (mA)	<0.5%			
Grid Frequency Range	47~52 or 57~62 (Optional)			
Efficiency				
Max. Efficiency	98.7%			
Euro Efficiency	98.3%			
MPPT Efficiency	>99%			
Protection				
DC Reverse-Polarity Protection	Yes			
AC Short Circuit Protection	Yes			
AC Output Overcurrent Protection	Yes			
Output Overvoltage Protection	Yes			
Insulation Resistance Protection	Yes			
Ground Fault Monitoring	Yes			
Anti-islanding Protection	Yes			
Temperature Protection	Yes			
Integrated DC Switch	Yes			
Remote software upload	Yes			
Remote change of operating parameters	Yes			
Surge protection	DC Type II / AC Type II			
General Data				
Size (mm)	700Wx575Hx297D			
Weight (kg)	60			
Topology	Transformerless			
Internal Consumption	<1W (Night)			
Running Temperature	-25~65°C, >45°C derating			
Ingress Protection	IP65			
Noise Emission (Typical)	<55 dB			
Cooling Concept	Smart cooling			
Max. Operating Altitude Without Derating	2000m			
Designed Lifetime	>20 years			
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11			
Operating Surroundings Humidity	0-100%			
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2			
Features				
DC Connection	MC-4 mateable			
AC Connection	IP65 rated plug			
Display	LCD 240 x 160			
Interface	RS485/RS232/Wifi/LAN			

Three Phase String Inverter

SUN- 70 / 75 / 80 / 90 / 100 / 110 K-G03



-  Max. 6 MPP trackers, Max. efficiency up to 98.7%
-  Zero export application, VSG application
-  String intelligent monitoring (optional)
-  Wide output voltage range
-  Anti-PID function (Optional)
-  Type II DC/AC SPD

Technical Data

Model	SUN-70K-G	SUN-75K-G	SUN-80K-G	SUN-90K-G	SUN-100K-G	SUN-110K-G
Input Side						
Max. DC Input Power (kW)	91	97.5	104	135	150	150
Max. DC Input Voltage (V)	1000					
Start-up DC Input Voltage (V)	250					
MPPT Operating Range (V)	200~850					
Max. DC Input Current (A)	40+40+40+40			40+40+40+40+40+40		
Max. Short Circuit Current (A)	60+60+60+60			60+60+60+60+60+60		
Number of MPPT / Strings per MPPT	4/4			6/4		
Output Side						
Rated Output Power (kW)	70	75	80	90	100	110
Max. Active Power (kW)	77	82.5	88	99	110	121
Nominal Output Voltage / Range (V)	3L/N/PE 380V/323V-418V, 400V/340V-440V					
Rated Grid Frequency (Hz)	50 / 60 (Optional)					
Operating Phase	Three phase					
Rated AC Grid Output Current (A)	101.5	108.7	115.9	130.4	144.9	159.4
Max. AC Output Current (A)	111.6	119.6	127.5	143.5	159.4	175.4
Output Power Factor	>0.99					
Grid Current THD	<3%					
DC Injection Current (mA)	<0.5%					
Grid Frequency Range	47~52 or 57~62 (Optional)					
Efficiency						
Max. Efficiency	98.7%					
Euro Efficiency	98.3%					
MPPT Efficiency	>99%					
Protection						
DC Reverse-Polarity Protection	Yes					
AC Short Circuit Protection	Yes					
AC Output Overcurrent Protection	Yes					
Output Overvoltage Protection	Yes					
Insulation Resistance Protection	Yes					
Ground Fault Monitoring	Yes					
Anti-islanding Protection	Yes					
Temperature Protection	Yes					
Integrated DC Switch	Yes					
Remote software upload	Yes					
Remote change of operating parameters	Yes					
Surge protection	DC Type II / AC Type II					
General Data						
Size (mm)	838Wx568Hx323D					
Weight (kg)	73.7					
Topology	Transformerless					
Internal Consumption	<1W (Night)					
Running Temperature	-25~65°C, >45°C derating					
Ingress Protection	IP65					
Noise Emission (Typical)	<55 dB					
Cooling Concept	Smart cooling					
Max. Operating Altitude Without Derating	2000m					
Designed Lifetime	>20 years					
Grid Connection Standard	CEI 0-21, VDE-AR-N 4105, NRS 097, IEC 62116, IEC 61727, G99, G98, VDE 0126-1-1, RD 1699, C10-11					
Operating Surroundings Humidity	0-100%					
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2					
Features						
DC Connection	MC-4 mateable					
AC Connection	IP65 rated plug					
Display	LCD 240 x 160					
Interface	RS485/RS232/Wifi/LAN					